




# STANDARD

# Test & Measuring Instruments

## PHASE SEQUENCE INDICATOR

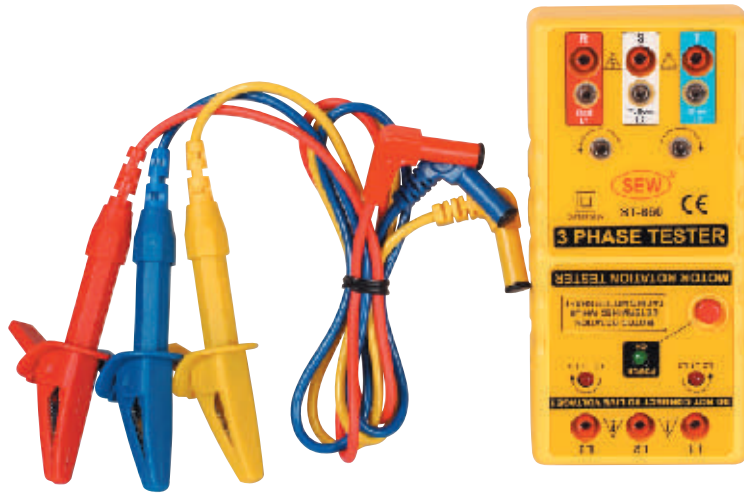

### ST-860

### FEATURES

- Three functions in one unit.  
Including open phase, phase sequence and motor rotation indication.
- Large size alligator clips.  
Can easily clip on switch-boards terminals.  
Highly reliable.
- Identifies 3 phase sequence and open phase check.
- Functional design  
This model is ideal for installing conveyor lines, pump systems and interconnected drivers.
- EN 61010-1 CAT III 600V

### SPECIFICATIONS

Input Voltage	100-600V AC
Frequency Range	45-70 Hz
Circuit Structure	All electronic (not mechanical)
Power Requirement	9V DC (006P) battery
Power Consumption	Consumption current approx. 14mA of motor rotation field tester
AC Power Consumption	Approx. 7mA per phase rotation filed indicator
Dimensions	153(L) x 72(W) x 35(D)mm
Weight	Approx. 200g (battery included)
Accessories	Test leads (AL-34) Vinyl case Battery Instruction manual