

USB

Temperature / Humidity Datalogger

- The data is directly transferred to computer via USB cable, the docking station is not required.
- Water Resistant IP 65.
- Hi-Low set-up alarm.
- USB interface for set-up and data download.
- Fast USB download speed-download 50K records in less than 10 seconds.




patent pending

◀ TM-305U

- Sensor : Internal.
- Type : Temperature / Humidity.
- Channel(s) : 2.
- Range : -40°C to +85.0°C/-40°F to +185.0°F
- Accuracy : ±0.8°C/±1.5°F
- Range : 0-100% RH.
- Accuracy :
±0.6°C(1.2°F) from -20 to 50°C(-4 to 122°F)
±1.0°C(1.8°F) all other rangers.
- Interface : USB.
- Datalogger Memory : 50,000 records.
- Dimension : 61X 47 X15mm.

TM-306U ▶

- Sensor : Internal.
- Type : Temperature
- Channel(s) : 1.
- Range : -40°C to 85°C. (-40°F to 185.0°F)
- Accuracy :
±0.6°C(1.2°F) from -20 to 50°C(-4 to 122°F)
±1.0°C(1.8°F) all other rangers.
- Interface : USB.
- Datalogger Memory : 50,000 records.
- Dimension : 61X 47 X15mm.

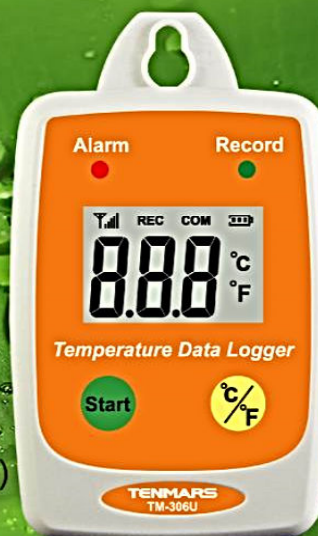

patent pending