





TM-181

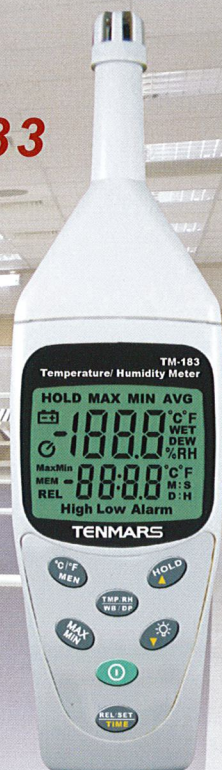

TM-183



Temperature & Humidity sensor

Maintenance , Utility ,
Technicians and
HVAC-SERVICE

- Dual LCD display: The maximum value on the primary display is 1999. The maximum value on secondary display is 9999.
- Backlit function, compact and light weight(165g).
- 200 records storage capacity.(TM-183)
- Auto power off with disable function.
- Low battery indication.

SPECIFICATIONS

Model	TM-181	TM-183
Rel(relative)	✓	✓
Auto power off	✓	✓
Max / Min	✓	✓
Max / Min / Avg		✓
Hold	✓	✓
Alarm	✓	✓
Backlit	✓	✓
Dew Point		✓
Wet Bulb		✓
Stores up to 200 readings		✓
Humidity range	1~99%RH	
Accuracy	± 2.5% for 30%~80% ± 3.0% for 20%~29.9% and 80.1%~89.9%, ± 5% for 1%~19.9% and 90.1%~99.9%.	
Temperature range	-20°C~60°C (-4°F~140°F)	
Accuracy	± 0.8°C, ±1.5°F	
Resolution	0.1°C / 0.1°F ; 0.1% RH.	
Size	200*56*38mm(L*W*H)	
Weight	165g	